




an EnerSys® company

Cordex® HP 4.6kW

Modular Switched Mode Rectifier

Distributed in Australia by:

Alpha
Power Systems

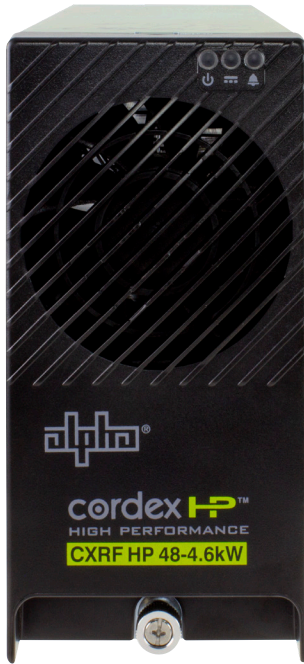

- High performance 95.8A rectifier for 48V telecom applications
- 95.3% efficiency for increased OPEX savings and reduced carbon footprint
- High power density 4RU compact design delivering up to 27.6kW per 23" shelf
- Power limiting and wide range AC input for global installation requirements
- Extended operating temperature range up to 75°C for deployment in the harshest outdoor environments
- Backwards compatibility with Cordex® 3.6/4.0kW rectifier shelves and power solutions providing cost effective upgrade path

Cordex® High-Performance switched mode rectifiers make a proven, reliable platform even better, with significant advancements in efficiency and performance.

In a compact, fan-cooled design, Alpha's HP rectifiers open the possibility for immediate OPEX/CAPEX savings, reducing total cost of ownership and impact on the environment, and are useable under a wider range of applications.

The Cordex® HP 4.6kW is a perfect solution for various 48Vdc capacity applications from small remote sites to large power systems at CO's, MTSO's and Data centers. Unlike other rectifiers in its category, the Cordex® HP 4.6kW provides 100% nominal power up to 40°C and at least 3600W up to 65°C. With a high operating efficiency (95.3%) and wide temperature operation (-40 to 75°C), HP series rectifiers are ideal for harsh outside plant enclosure installations.

The Cordex® HP 4.6kW is a backwards compatible solution with existing Cordex® 3.6kW shelves and systems, providing users an easy upgrade path to greater power density and reduced OPEX.

Local and remote setup, adjustment and control is a simple single-step process with Cordex® CXC HP system controllers. By utilizing TCP/IP technology, complete configuration and monitoring of power equipment is possible through a network web browser.

Cordex® HP 4.6kW 48V Modular Switched Mode Rectifier

P/N: 0100044-001

Electrical	
Input Voltage:	Nominal: 208 to 277VAC Operating: 195 to 305VAC Extended: 95 to 195VAC (de-rated power)
Input Current:	Nominal: 24 to 18A Max: 25.6A @ 195VAC
Input Frequency:	45 to 66Hz
Power Factor:	>0.99 (50 to 100% load)
THD:	<9% @ Nominal input 100% load
Efficiency:	95.3%
Output Voltage:	44 to 58VDC
Output Power:	4600W continuous
Output Current:	85A @ 54VDC (95.8A max 48V)
Load Regulation:	<±0.5% (static)
Line Regulation:	<±0.1% (static)
Transient Response:	±3% for 40 to 90% load step
Noise:	Voice Band: <42dBmC Wide Band: <30mV RMS (10kHz to 10MHz) <150mV pk to pk (10kHz to 100MHz)
Psophometric:	<2mV
Acoustic:	<64dBA @ 1m (3ft)
Performance/Features	
Indicators:	AC mains OK — green LED Module OK — green LED Module fail — red LED
Controls:	CAN interface to CXK
Adjustments: (via CXK HP controller)	<ul style="list-style-type: none"> • Float voltage • Equalize voltage • High/low voltage alarm • High voltage shutdown • Current limit • Slope • Start delay
Protection:	<ul style="list-style-type: none"> • Current limit/short circuit • Start delay • Input/output fuses • Output high voltage shutdown • Power limiting • Thermal foldback/shutdown • Input transient • AC low line foldback shutdown
Mechanical - Rectifier	
Dimensions:	mm: 160H x 87W x 300D inches: 6.3H x 3.4W x 11.8D
Weight:	3.9kg (8.6lbs)

Environmental	
Temperature:	Operating: -40 to 75°C (-40 to 176°F); full rated output up to 40°C (104°F); >3600W @ 65°C (149°F) Storage: -40 to 85°C (-40 to 185°F)
Humidity:	0 to 95% RH non-condensing
Elevation:	-500 to 4000m (-1640 to 13120ft)
Heat Dissipation:	1347 BTU per hour / 395 Watts (Worst Case)
Mechanical - Shelves	
19"/23" Shelf (5 modules)	
Dimensions:	mm: 177H x 442W x 389D inches: 6.9H x 17.4W x 15.3D
Weight:	8.5kg (19lbs)
Mounting:	Fits 19" rack flush/center mount Fits 23" rack center mount only
23" Shelf (6 modules)	
Dimensions:	mm: 177H x 530W x 389D inches: 6.9H x 20.8W x 15.3D
Weight:	9.5kg (21lbs)
Mounting:	Fits 23" racks only flush/center mount
Connections	
Input:	Box type terminal block 6 to 16mm ² (10 to 6AWG)
Output:	Bus adapters with 3/8" studs on 1" centers
Chassis Ground:	Compression lug 6 to 16mm ² (10 to 6AWG)
CAN Communication:	RJ 12 offset
Standards	
Safety:	<ul style="list-style-type: none"> • CSA C22.2 No 60950-1-03 • UL 60950-1 • CE marked • IEC/EN 60950-1
EMC:	ETSI 300 386 Emissions: <ul style="list-style-type: none"> • CFR47 (FCC) Part 15 Class B • ICES-03 Class B • EN55022 (CISPR 22) Class B • C-Tick (Australia) • EN 61000-3-2, 3-3 Immunity: <ul style="list-style-type: none"> • EN 61000-4-2, 4-3, 4-4, 4-5, 4-6, 4-11 • ANSI/IEEE C62.41 Cat B3
NEBS:	<ul style="list-style-type: none"> • GR-1089 CORE (Pending) • GR-63 CORE (Pending)

For more information, please contact Australian Distributor:



Alpha Power Systems Pty Ltd
18/30 Heathcote Road
Moorebank NSW 2170
Australia

Phone: +61 2 96028331
Fax: +61 2 96029180
E-mail: admin@alphapower.com.au
Website: www.alphapower.com.au



an EnerSys® company

Alpha Technologies Services, Inc. USA: 3767 Alpha Way, Bellingham, WA 98226 Canada: 7700 Riverfront Gate, Burnaby, BC V5J 5M4
Toll Free North America: +1 800 322 5742 Outside US: +1 360 647 2360 Technical Support: +1 800 863 3364
For more information visit www.alpha.com

© 2020 Alpha Technologies Services, Inc. All Rights Reserved. Trademarks and logos are the property of Alpha Technologies Services, Inc. and its affiliates unless otherwise noted. Subject to revisions without prior notice. E. & O.E.

09/2020
#0480046-00 REV A