

Modular Rectifier Shelf Systems

Cordex 48-1kW Rectifier Shelves

	Rectifiers	Controller	Distribution	Part Number
19" Flush Mount	3 x CXRC 48-1kW	1 x CXCM	CXD with DIN type breakers	030-713-20 L0
19" Flush Mount	5 x CXRC 48-1kW	1 x CXCM	Bulk power for external distribution panel	030-707-20 L0
19" Flush Mount	6 x CXRC 48-1kW	Requires CXCR rack mount controller	Bulk power for external distribution panel	030-707-20 L81
19/23" Center Mount	5 x CXRC 48-1kW	1 x CXCM	Bulk power for external distribution panel	030-706-20 L0
19/23" Center Mount	6 x CXRC 48-1kW	Requires CXCR rack mount controller	Bulk power for external distribution panel	030-706-20 L81
23" Center Mount	4 x CXRC 48-1kW	1 x CXCM	CXD with Bullet type breakers & GMT fuse option	030-704-20 L0



Cordex 4kW Shelf Power System

- Integrated 48VDC shelf power systems up to 4kW
- Bulk 48VDC power systems up to 6kW
- Distribution modules available for DIN or bullet type breakers
- Available for 19" and 23" rack mounting
- Designed for CSA, UL, CE, FCC & C-Tick standards

Argus' Cordex series includes a complete range of modular 1kW rectifier shelf systems to meet the needs of worldwide telecommunications applications.


Cordex 1kW modular systems range from a 6kW bulk power 19" shelf to a 4kW fully integrated 23" shelf power system with CXCM plug in controller and distribution module. Distribution modules are available in either DIN type breaker or bullet type breaker with a GMT type fuse option.

Argus Cordex 1kW rectifier modules feature complete hot-swappability, high efficiency with power factor correction, unique power limiting capability, and wide range input. Convection cooling and an ultra compact design also make Cordex CXS shelf systems ideal for the telecommunications industry.

ARGUS

ARGUS

Cordex 1kW CXS Modular Rectifier Shelf Systems

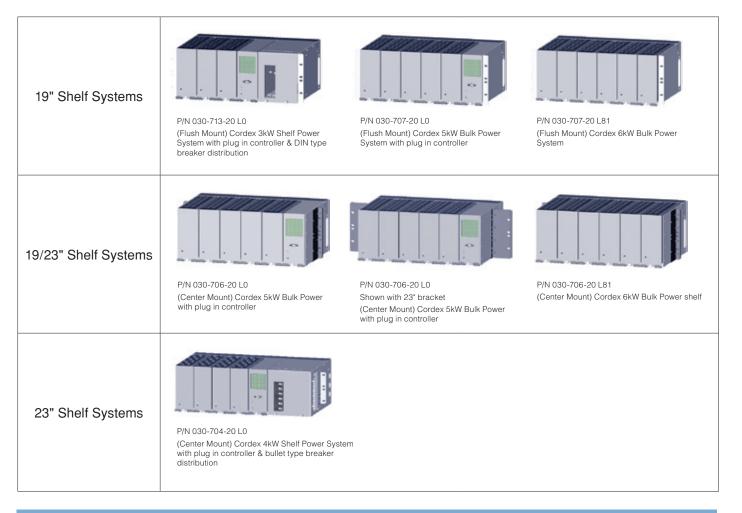

Shelves

Mechanical 19" & 19/23"

Dimensions mm: inches:

inches: Weight:

23" Dimensions mm: inches: Weight: 177H x 444W x 302D 6.9H x 17.5W x 11.9D 7.5kg (16.5lb)

177H x 543W x 302D 6.9H x 21.4W x 11.9D 10.2kg (22.5lb)

Note:

Shelf P/Ns DO NOT include rectifier modules or distribution breakers. Weights DO NOT include modules. Dimensions do not include mounting brackets.

Communication Ports

CAN: Interface to control rectifiers. Ethernet: 10/100 Base-T for TCIP/SNMP features.

See Cordex datasheets for details on system equipment: Cordex Rectifier CXRC 48-1kW #048-630-10 Cordex Controller CXC #048-631-10



For more information, please contact:

Alpha Power Systems Pty Ltd 18/30 Heathcote Road Moorebank NSW 2170 Australia Phone: +61 2 9602 8331 Fax: +61 2 9602 9180 E-mail: admin@alphapower.com.au Website: www.alphapower.com.au